

ANGIOGRAPHY




DIAGNOSTIC CARDIOLOGY CATHETERS


| Catheter Shape Illustrations | 19-20 |
|--------------------------------------|-------|
| Judkins Left | 21 |
| Judkins Left Short-Tip | 22 |
| Judkins Right | 22 |
| Judkins Right Short-Tip | 23 |
| Judkins Right Modified | 23 |
| Amplatz Left | 23 |
| Amplatz Left Coronary | 24 |
| Amplatz Right | 24 |
| Left Coronary Bypass | 25 |
| Right Coronary Bypass | 25 |
| Progressive Right Coronary | 25 |
| Internal Mammary | 25 |
| Cardiac Straight Pigtail | 26 |
| Cardiac 145° Pigtail | 26 |
| Cardiac 155° Pigtail | 27 |
| Cardiac MultiPack | 27 |
| Cardiac MultiPack Plus | 28 |
| Multipurpose | 29 |
| Sones | 29 |
| Internal Mammary Brachial / Radial | 30 |
| Left Coronary Brachial / Radial | 30 |
| Right Coronary Brachial / Radial | 30 |
| MIV™ Radial Pigtail | 31 |
| Radial MultiPack Plus | 32 |
| Ultimate Angiographic | 33-34 |
| Impress Material | 34 |
| Paediatric Judkins Right & Left | 35 |
| Paediatric Pigtails, FEP | 35 |
| Standard Paediatric Pigtails (Nylon) | 36 |
| Vessel Sizing – Paediatric | 36 |

| DIAGNOSTIC GUIDE WIRES | |
|--|-------|
| InQwire® PTFE Coated Guide Wires | 37 |
| HYDROPHILIC GUIDE WIRES | |
| Merit Laureate® Hydrophilic Guide Wires | 37 |
| GUIDE WIRE ACCESSORIES | |
| H2O Torq [™] Torque Devices | 38 |
| SeaDragon™ Torque Device | 38 |
| FLUID MANAGEMENT & TUBING | |
| Miser® Contrast Management Systems | 39 |
| Contrast Management Systems | 40-41 |
| Fluid Administration Sets | 42-44 |
| High Pressure Tubing | 45 |
| Pressure Monitoring Tubing | 46 |
| PIB - Pressure Infusor Bags™ | 47 |
| MANIFOLDS, STOPCOCKS & ADAPTERS | |
| Merit® Manifolds | 48-49 |
| Devos [™] Manifolds | 50 |
| Pressurised Contrast Administration Systems | 50 |
| TRAM® Manifolds with Integral Transducer | 51 |
| $TRAM\text{-}P^{^{TM}}$ Manifolds with Integral Transducer | 52 |
| Rapid Response Right Heart Kits | 53 |
| Marquis® Series Stopcocks | 54 |
| Airless Rotating Adapters | 55 |
| SYRINGES | |
| CCS [™] Coronary Control Syringes | 56-57 |
| RXP® Flushing Syringe | 58 |
| VacLok® Vacuum Pressure Syringes | 58 |
| TRANSDUCERS & ACCESSORIES | |
| Meritrans® Pressure Transducers | 59-62 |
| Meritrans Accessories | |
| Meritrans Organiser | 62 |
| Clipper Pole Mount | 62 |
| Meritrans Reusable Cable | 62 |

- a. JUDKINS LEFT 3.5
- b. JUDKINS LEFT 4.0
- c. JUDKINS LEFT 4.5
- d. JUDKINS LEFT 5.0
- e. JUDKINS LEFT 6.0
- f. JUDKINS LEFT SHORT TIP 3.5
- g. JUDKINS LEFT SHORT TIP 4.0
- h. JUDKINS LEFT SHORT TIP 5.0
- i. JUDKINS LEFT SHORT TIP 6.0

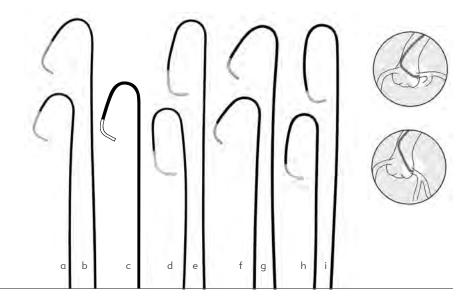


- a. AMPLATZ LEFT 1
- b. AMPLATZ LEFT 2
- c. AMPLATZ LEFT 3
- d. AMPLATZ LEFT 4
- e. AMPLATZ RIGHT 1
- f. AMPLATZ RIGHT 2
- g. AMPLATZ RIGHT 3
- h. AMPLATZ RIGHT MODIFIED
- i. PROGRESSIVE RIGHT (non-torque)

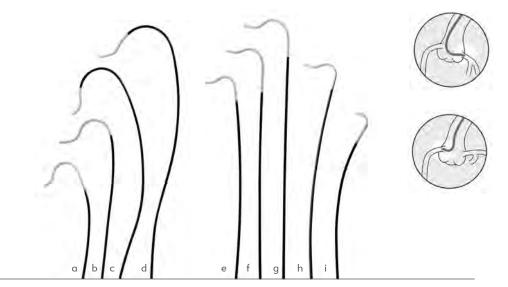




- b. JUDKINS RIGHT 4.0
- c. JUDKINS RIGHT 4.5
- d. JUDKINS RIGHT 5.0
- e. JUDKINS RIGHT 6.0
- f. JUDKINS RIGHT SHORT TIP 3.5
- g. JUDKINS RIGHT SHORT TIP 4.0
- h. JUDKINS RIGHT SHORT TIP 5.0
- i. JUDKINS RIGHT SHORT TIP 6.0
- j. JUDKINS RIGHT MODIFIED 3.5
- k. JUDKINS RIGHT MODIFIED 4.0
- I. JUDKINS RIGHT MODIFIED 5.0
- m. JUDKINS RIGHT MODIFIED 6.0

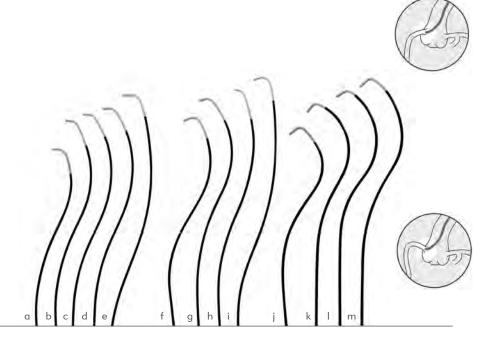


- a. STRAIGHT PIGTAIL
- b. 145° PIGTAIL
- c. 155° PIGTAIL
- d. MULTIPURPOSE A1
- e. MULTIPURPOSE A2
- f. MULTIPURPOSE B1
- g. MULTIPURPOSE B2
- h. SONES

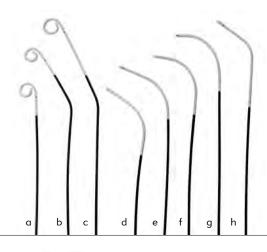



- a. LEFT CORONARY BYPASS
- b. RIGHT CORONARY BYPASS
- c. INTERNAL MAMMARY

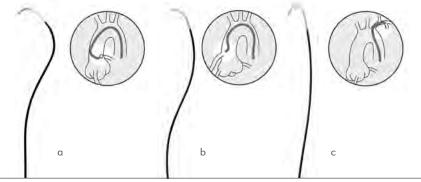


- a. INTERNAL MAMMARY


 LEFT BRACHIAL/RADIAL 1
- b. INTERNAL MAMMARY
 LEFT BRACHIAL/RADIAL 2
- c. LEFT CORONARY

 BRACHIAL/RADIAL 1
- d. LEFT CORONARY

 BRACHIAL/RADIAL 2
- e. LEFT CORONARY
 BRACHIAL/RADIAL 3
- f. RIGHT CORONARY BRACHIAL/RADIAL
- g. AMPLATZ LEFT CORONARY BRACHIAL/RADIAL
- h. ULTIMATE 1
- i. ULTIMATE 2
- j. ULTIMATE 3
- k. ULTIMATE 4

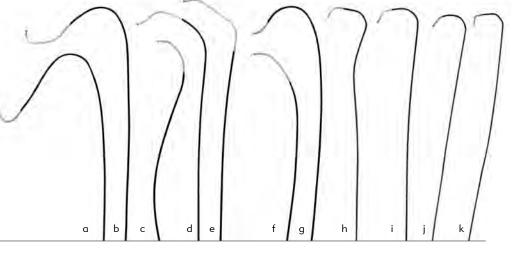

- a. PED. JUDKINS LEFT 1.5
- b. PED. JUDKINS LEFT 2.0
- c. PED. JUDKINS LEFT 2.5
- d. PED. JUDKINS LEFT 3.0
- e. PED. JUDKINS RIGHT 1.5
- f. PED. JUDKINS RIGHT 2.0
- g. PED. JUDKINS RIGHT 2.5
- h. PED. JUDKINS RIGHT 3.0

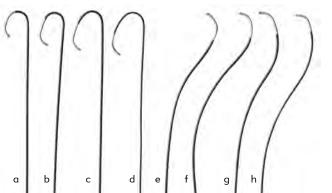

PERFORMA® JUDKINS LEFT CATHETERS

| Catalogue Number | French Size | Internal Diameter | Length | Length Of Tip | Description | | |
|---------------------|----------------|----------------------|--------|------------------|-----------------|-------------|--------|
| 7700-10 | 4 | .042"/1.07 mm | 100 cm | 2.3 cm | JL3.5 bump | er tip | |
| 7700-20 | 4 | .042"/1.07 mm | 100 cm | 2.3 cm | JL4.0 bump | er tip | |
| 7700-30 | 4 | .042"/1.07 mm | 100 cm | 2.3 cm | JL5.0 bump | er tip | |
| 7700-40 | 4 | .042"/1.07 mm | 100 cm | 2.3 cm | JL6.0 bump | er tip | |
| 7521-13 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JL3.5 | | |
| 7521-21 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JL4.0 | | |
| 7521-F1 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JL4.5 | u . | JL 3.5 |
| 7521-33 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JL5.0 | _ | |
| 7521-43 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JL6.0 | | JL 4.0 |
| 7521-53 | 5 | .046"/1.17 mm | 125 cm | 2.5 cm | JL3.5 | | |
| 7521-63 | 5 | .046"/1.17 mm | 125 cm | 2.5 cm | JL4.0 | 11 | 11 4 5 |
| 7521-73 | 5 | .046"/1.17 mm | 125 cm | 2.5 cm | JL5.0 | | JL 4.5 |
| 7521-83 | 5 | .046"/1.17 mm | 125 cm | 2.5 cm | JL6.0 | | |
| 7601-13 | 5 | .052"/1.32 mm | 100 cm | 2.5 cm | JL3.5-High Flow | non-braided | |
| 7601-21 | 5 | .052"/1.32 mm | 100 cm | 2.5 cm | JL4.0-High Flow | non-braided | |
| 7601-33 | 5 | .052"/1.32 mm | 100 cm | 2.5 cm | JL5.0-High Flow | non-braided | |
| 7601-43 | 5 | .052"/1.32 mm | 100 cm | 2.5 cm | JL6.0-High Flow | non-braided | |
| 7501-13 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JL3.5 | | |
| 7501-21 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JL4.0 | | |
| 7501-H1 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JL4.5 | | 11 5 0 |
| 7501-33 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JL5.0 | U | JL 5.0 |
| 7501-43 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JL6.0 | | |
| 7501-53 | 6 | .054"/1.37 mm | 125 cm | 1.9 cm | | | JL 6.0 |
| 7501-63 | 6 | .054"/1.37 mm | 125 cm | 1.9 cm | JL4.0 | | |
| 7501-73 | 6 | .054"/1.37 mm | 125 cm | 1.9 cm | JL5.0 | | |
| 7501-83 | 6 | .054"/1.37 mm | 125 cm | 1.9 cm | JL6.0 | | |
| 7574-13 | 6 | .059"/1.50 mm | 100 cm | 2.5 cm | JL3.5-High Flow | non-braided | |
| 7574-21 | 6 | .059"/1.50 mm | 100 cm | 2.5 cm | JL4.0-High Flow | non-braided | |
| 7574-33 | 6 | .059"/1.50 mm | 100 cm | 2.5 cm | JL5.0-High Flow | non-braided | |
| 7574-43 | 6 | .059"/1.50 mm | 100 cm | 2.5 cm | JL6.0-High Flow | non-braided | |
| | | | | | | | |

JL 6.0 ST

PERFORMA® JUDKINS LEFT SHORT-TIP CATHETERS

| French | Internal | | Length | | | |
|--------------|---------------------|---|---|---|---|---|
| Size | Diameter | Length | Of Tip | Description | | |
| | | | | | | |
| 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JL3.5 ST | | JL 3.5 ST |
| 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JL4.0 ST | | 72 0.3 31 |
| 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JL5.0 ST | | |
| 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JL6.0 ST | | JL 4.0 ST |
| | | | | | | |
| ed guide wir | e is .038" (0.97 mn | n) | | | , | JL 5.0 ST |
| | | | | | | |
| | 6 6 6 6 | Size Diameter 6 .054"/1.37 mm 6 .054"/1.37 mm 6 .054"/1.37 mm 6 .054"/1.37 mm | Size Diameter Length 6 .054"/1.37 mm 100 cm 6 .054"/1.37 mm 100 cm 6 .054"/1.37 mm 100 cm | Size Diameter Length Of Tip 6 .054"/1.37 mm 100 cm 1.9 cm 6 .054"/1.37 mm 100 cm 1.9 cm 6 .054"/1.37 mm 100 cm 1.9 cm 6 .054"/1.37 mm 100 cm 1.9 cm | Size Diameter Length Of Tip Description 6 .054"/1.37 mm 100 cm 1.9 cm JL3.5 ST 6 .054"/1.37 mm 100 cm 1.9 cm JL4.0 ST 6 .054"/1.37 mm 100 cm 1.9 cm JL5.0 ST 6 .054"/1.37 mm 100 cm 1.9 cm JL6.0 ST | Size Diameter Length Of Tip Description 6 .054"/1.37 mm 100 cm 1.9 cm JL3.5 ST 6 .054"/1.37 mm 100 cm 1.9 cm JL4.0 ST 6 .054"/1.37 mm 100 cm 1.9 cm JL5.0 ST 6 .054"/1.37 mm 100 cm 1.9 cm JL6.0 ST |

PERFORMA® JUDKINS RIGHT CATHETERS

| Catalogue Number | French Size | Internal Diameter | Length | Length Of Tip | Descri | otion | |
|---------------------|----------------|----------------------|--------|------------------|--------|------------|--------|
| | | | | <u> </u> | | | |
| 7701-10 | 4 | .042"/1.07 mm | 100 cm | 2.5 cm | JR3.5 | bumper tip | |
| 7701-20 | 4 | .042"/1.07 mm | 100 cm | 2.5 cm | JR4.0 | bumper tip | |
| 7701-50 | 4 | .042"/1.07 mm | 100 cm | 2.5 cm | JR4.5 | bumper tip | |
| 7701-30 | 4 | .042"/1.07 mm | 100 cm | 2.5 cm | JR5.0 | bumper tip | |
| 7701-40 | 4 | .042"/1.07 mm | 100 cm | 2.5 cm | JR6.0 | bumper tip | |
| 7523-13 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JR3.5 | _ | |
| 7523-21 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JR4.0 | _ | JR 3.5 |
| 7523-93 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JR4.5 | _ | |
| 7523-33 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JR5.0 | | JR 4.0 |
| 7523-43 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JR6.0 | | |
| | | | | | | / | JR 4.5 |
| 7523-53 | 5 | .046"/1.17 mm | 125 cm | 2.5 cm | JR3.5 | | J |
| 7523-63 | 5 | .046"/1.17 mm | 125 cm | 2.5 cm | JR4.0 | _ / | |
| 7523-73 | 5 | .046"/1.17 mm | 125 cm | 2.5 cm | JR5.0 | | |
| 7523-83 | 5 | .046"/1.17 mm | 125 cm | 2.5 cm | JR6.0 | _ | JR 5.0 |
| 7503-13 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR3.5 | | |
| 7503-21 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR4.0 | | JR 6.0 |
| 7503-93 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR4.5 | | JK 0.0 |
| 7503-33 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR5.0 | | |
| 7503-43 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR6.0 | | |
| | | | | | | | |
| 7503-53 | 6 | .054"/1.37 mm | 125 cm | 1.9 cm | JR3.5 | _ | |
| 7503-63 | 6 | .054"/1.37 mm | 125 cm | 1.9 cm | JR4.0 | _ | |
| 7503-73 | 6 | .054"/1.37 mm | 125 cm | 1.9 cm | JR5.0 | | |
| 7503-83 | 6 | .054"/1.37 mm | 125 cm | 1.9 cm | JR6.0 | | |


PERFORMA® JUDKINS RIGHT SHORT-TIP CATHETERS

| Catalogue | French | Internal | | Length | | | |
|-----------|------------|-----------------------|--------|--------|-------------|---|------------|
| Number | Size | Diameter | Length | Of Tip | Description | | |
| | | | | | | | |
| 7523-E3 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JR3.5 ST | | |
| 7523-F1 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JR4.0 ST | | |
| 7523-G3 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JR5.0 ST | | JR3.5 ST |
| 7523-H3 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | JR6.0 ST | Ŋ | 31(3.5) 51 |
| | | | | | | | 10.40.00 |
| 7503-A3 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR3.5 ST | | JR4.0 ST |
| 7503-B1 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR4.0 ST | _ | |
| 7503-C3 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR5.0 ST | | IDE O CT |
| 7503-D3 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR6.0 ST | | JR5.0 ST |
| | | | | | | | |
| Recommen | ided guide | e wire is .038" (0.97 | mm) | | | | JR6.0 ST |

PERFORMA® JUDKINS RIGHT MODIFIED CATHETERS

| Catalogue Number | French Size | Internal Diameter | Length | Length Of Tip | Description |
|---------------------|----------------|----------------------|--------|------------------|-------------|
| 7502-13 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR3.5 |
| 7502-23 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR4.0 |
| 7502-33 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR5.0 |
| 7502-43 | 6 | .054"/1.37 mm | 100 cm | 1.9 cm | JR6.0 |

Recommended guide wire is .038" (0.97 mm)



PERFORMA® AMPLATZ LEFT CATHETERS

| Catalogue | | Internal | | Length | | | |
|-----------|-----------|-----------------------|--------|--------|---------|------------|-----|
| Number | Size | Diameter | Length | Of Tip | Descrip | otion | |
| 7703-10 | 4 | .042"/1.07 mm | 100 cm | 5.0 cm | AL1 | bumper tip | |
| 7703-20 | 4 | .042"/1.07 mm | 100 cm | 2.2 cm | AL2 | bumper tip | |
| 7703-30 | 4 | .042"/1.07 mm | 100 cm | 2.3 cm | AL3 | bumper tip | |
| 7703-40 | 4 | .042"/1.07 mm | 100 cm | 2.5 cm | AL4 | bumper tip | |
| | | | | | | | |
| 7527-13 | 5 | .046"/1.17 mm | 100 cm | 5.0 cm | AL1 | | AL1 |
| 7527-23 | 5 | .046"/1.17 mm | 100 cm | 5.0 cm | AL2 | | ALI |
| 7527-33 | 5 | .046"/1.17 mm | 100 cm | 2.0 cm | AL3 | | |
| 7527-43 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | AL4 | | AL2 |
| 7507.10 | | 05.4#/1.07 | 100 | | A 1 1 | _ | |
| 7507-13 | 6 | .054"/1.37 mm | 100 cm | 5.0 cm | AL1 | | |
| 7507-23 | 6 | .054"/1.37 mm | 100 cm | 5.0 cm | AL2 | | AL3 |
| 7507-33 | 6 | .054"/1.37 mm | 100 cm | 2.4 cm | AL3 | | |
| 7507-43 | 6 | .054"/1.37 mm | 100 cm | 2.5 cm | AL4 | | |
| Recommen | ded guide | e wire is .038" (0.97 | mm) | | | | AL4 |

PERFORMA® AMPLATZ LEFT CORONARY CATHETER


| Catalogue Number | French Size | Internal Diameter | Length | Length Of Tip | Descrip | tion | |
|---------------------|----------------|----------------------|--------|------------------|---------|------------|--|
| 7703-B0 | 4 | .042"/1.07 mm | 100 cm | 1.5 cm | AL2 | bumper tip | |

Recommended guide wire is .038" (0.97 mm)



PERFORMA® AMPLATZ RIGHT CATHETERS

| Catalogue | French | Internal | | Length | | |
|-----------|--------|---------------|--------|--------|-------------|------------|
| Number | Size | Diameter | Length | Of Tip | Description | |
| | | | | | | |
| 7702-40 | 4 | .042"/1.07 mm | 100 cm | 3.3 cm | AR MOD | bumper tip |
| 7702-10 | 4 | .042"/1.07 mm | 100 cm | 3.3 cm | AR1 | bumper tip |
| 7702-20 | 4 | .042"/1.07 mm | 100 cm | 5.0 cm | AR2 | bumper tip |
| 7702-30 | 4 | .042"/1.07 mm | 100 cm | 5.0 cm | AR3 | bumper tip |
| | | | | | | |
| 7526-11 | 5 | .046"/1.17 mm | 100 cm | 3.3 cm | AR MOD | |
| 7528-13 | 5 | .046"/1.17 mm | 100 cm | 3.3 cm | AR1 | |
| 7528-23 | 5 | .046"/1.17 mm | 100 cm | 5.0 cm | AR2 | |
| 7528-33 | 5 | .046"/1.17 mm | 100 cm | 5.0 cm | AR3 | |
| | | | | | | |
| 7506-11 | 6 | .054"/1.37 mm | 100 cm | 3.3 cm | AR MOD | |
| 7508-13 | 6 | .054"/1.37 mm | 100 cm | 3.0 cm | AR1 | |
| 7508-23 | 6 | .054"/1.37 mm | 100 cm | 3.5 cm | AR2 | |
| 7508-33 | 6 | .054"/1.37 mm | 100 cm | 4.0 cm | AR3 | |
| | | | | | | |

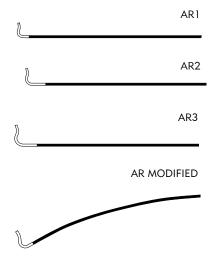

PERFORMA® LEFT CORONARY BYPASS (LCB) CATHETERS

| Catalogue Number | French Size | Internal Diameter | Length | Length Of Tip | Description | |
|---------------------|----------------|----------------------|--------|------------------|-------------|-------|
| 7709-10 | 4 | .042"/1.07 mm | 100 cm | 2.5 cm | bumper tip | a LCB |
| 7534-13 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | | (ECB |
| 7510-13 | 6 | .054"/1.37 mm | 100 cm | 2.5 cm | | |

Recommended guide wire is .038" (0.97 mm)

PERFORMA® RIGHT CORONARY BYPASS (RCB) CATHETERS

| Catalogue Number | French Size | Internal Diameter | Length | Length Of Tip | Description | |
|---------------------|----------------|----------------------|--------|------------------|-------------|-----|
| 7709-20 | 4 | .042"/1.07 mm | 100 cm | 2.5 cm | bumper tip | RCE |
| 7534-23 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | · · · | |
| 7510-23 | 6 | .054"/1.37 mm | 100 cm | 2.5 cm | | |

Recommended guide wire is .038" (0.97 mm)

PERFORMA® PROGRESSIVE RIGHT CORONARY (PRC) CATHETERS, NON-TORQUE

| Catalogue | French | Internal | | Length | | |
|-----------|--------|---------------|--------|--------|-------------|----|
| Number | Size | Diameter | Length | Of Tip | Description | |
| | | | | | | |
| 7707-10 | 4 | .042"/1.07 mm | 100 cm | 2.5 cm | bumper tip | |
| 7600-11 | 5 | .052"/1.32 mm | 100 cm | 2.5 cm | non-braided | PR |
| 7532-13 | 5 | .046"/1.17 mm | 100 cm | 2.5 cm | | |
| 7572-11 | 6 | .059"/1.50 mm | 100 cm | 2.5 cm | non-braided | |
| 7512-13 | 6 | .054"/1.37 mm | 100 cm | 2.5 cm | | |
| 7512-23 | 6 | .054"/1.37 mm | 125 cm | 2.5 cm | | |

Recommended guide wire is .038" (0.97 mm)

PERFORMA® INTERNAL MAMMARY (IMA) CATHETERS

| Catalogue | French | Internal | | Length | | |
|-----------|--------|---------------|--------|--------|-------------|------|
| Number | Size | Diameter | Length | Of Tip | Description | |
| 7706-10 | 4 | .042"/1.07 mm | 100 cm | 3.3 cm | bumper tip | IMA |
| 7531-33 | 5 | .042 /1.07 mm | 65 cm | 3.3 cm | витрег пр | IIWA |
| 7531-13 | 5 | .046"/1.17 mm | 100 cm | 3.3 cm | | |
| 7511-13 | 6 | .054"/1.37 mm | 100 cm | 3.3 cm | | |

PERFORMA® STRAIGHT CARDIAC PIGTAIL CATHETERS

| Catalogue | French | Internal | | Length | | # Side | Small |
|-----------|--------|---------------|--------|--------|-------------|--------|---------------|
| Number | Size | Diameter | Length | Of Tip | Description | Ports | Pigtail Curve |
| | | | | | | _ | |
| 7704-70 | 4 | .042"/1.07 mm | 80 cm | 6.5 cm | braided | 5 | |
| 7704-10 | 4 | .042"/1.07 mm | 110 cm | 6.5 cm | braided | 5 | |
| 7776-11 | 5 | .046"/1.17 mm | 90 cm | 5.0 cm | braided | 5 | yes |
| 7776-21 | 5 | .046"/1.17 mm | 110 cm | 5.0 cm | braided | 5 | yes |
| 7776-B1 | 5 | .052"/1.32 mm | 110 cm | 4.6 cm | non-braided | 5 | yes |
| 7602-11 | 5 | .052"/1.32 mm | 110 cm | 7.5 cm | non-braided | 5 | |
| 7529-11 | 5 | .046"/1.17 mm | 110 cm | 7.5 cm | braided | 5 | |
| 7529-43 | 5 | .046"/1.17 mm | 125 cm | 7.5 cm | braided | 5 | |
| 7569-11 | 6 | .059"/1.50 mm | 110 cm | 8.0 cm | non-braided | 5 | |
| 7509-11 | 6 | .054"/1.37 mm | 110 cm | 7.5 cm | braided | 5 | |
| 7777-B1 | 6 | .059"/1.50 mm | 110 cm | 4.8 cm | non-braided | 5 | yes |
| 7777-21 | 6 | .054"/1.37 mm | 110 cm | 4.6 cm | braided | 5 | yes |
| 7509-43 | 6 | .054"/1.37 mm | 125 cm | 7.5 cm | braided | 5 | |
| 7569-43 | 6 | .059"/1.50 mm | 125 cm | 8.0 cm | non-braided | 5 | |

Recommended guide wire is .038" (0.97 mm)



PIGTAIL

PERFORMA® 145° CARDIAC PIGTAIL CATHETERS


| Catalogue Number | French Size | Internal Diameter | Length | Length Of Tip | Description | # Side Ports | Angle Length | Small Pigtail Curve |
|---------------------|----------------|----------------------|--------|------------------|-------------|-----------------|-----------------|------------------------|
| 7704-20 | 4 | .042"/1.07 mm | 110 cm | 6.5 cm | braided | 5 | 5.5 cm | |
| | | | | | | | | |
| 7776-C3 | 5 | .052"/1.32 mm | 110 cm | 4.6 cm | non-braided | 5 | 5.5 cm | yes |
| 7776-33 | 5 | .046"/1.17 mm | 110 cm | 5.0 cm | braided | 5 | 5.5 cm | yes |
| 7529-53 | 5 | .046"/1.17 mm | 125 cm | 7.5 cm | braided | 5 | 7.5 cm | |
| 7602-23 | 5 | .052"/1.32 mm | 110 cm | 7.5 cm | non-braided | 5 | 7.5 cm | |
| 7529-23 | 5 | .046"/1.17 mm | 110 cm | 7.5 cm | braided | 5 | 7.5 cm | |
| 7569-23 | 6 | .059"/1.50 mm | 110 cm | 8.0 cm | non-braided | 5 | 5.5 cm | |
| 7509-23 | 6 | .054"/1.37 mm | 110 cm | 7.5 cm | braided | 5 | 5.5 cm | |
| 7777-C3 | 6 | .059"/1.50 mm | 110 cm | 7.5 cm | non-braided | 5 | 5.5 cm | yes |
| 7777-33 | 6 | .054"/1.37 mm | 110 cm | 4.6 cm | braided | 5 | 5.5 cm | yes |
| 7509-53 | 6 | .054"/1.37 mm | 125 cm | 7.5 cm | braided | 5 | 5.5 cm | |
| 7569-53 | 6 | .059"/1.50 mm | 125 cm | 8.0 cm | non-braided | 5 | 5.5 cm | |



PERFORMA® 155° CARDIAC PIGTAIL CATHETERS

| Catalogue Number | French Size | Internal Diameter | Length | Length Of Tip | Description | # Side Ports | Angle Length | Small Pigtail Curve |
|---------------------|----------------|----------------------|--------|------------------|-------------|-----------------|-----------------|------------------------|
| | | | | - | <u> </u> | | | |
| 7704-30 | 4 | .042"/1.07 mm | 110 cm | 6.5 cm | braided | 5 | 5.5 cm | |
| | | | | | | | | |
| 7602-33 | 5 | .052"/1.32 mm | 110 cm | 7.5 cm | non-braided | 5 | 7.5 cm | |
| 7529-33 | 5 | .046"/1.17 mm | 110 cm | 7.5 cm | braided | 5 | 7.5 cm | |
| 7529-63 | 5 | .046"/1.17 mm | 125 cm | 7.5 cm | braided | 5 | 7.5 cm | |
| 7776-D3 | 5 | .052"/1.32 mm | 110 cm | 4.6 cm | non-braided | 5 | 5.5 cm | yes |
| 7776-43 | 5 | .046"/1.17 mm | 110 cm | 5.0 cm | braided | 5 | 5.5 cm | yes |
| | | | | | | | | |
| 7569-33 | 6 | .059"/1.50 mm | 110 cm | 8.0 cm | non-braided | 5 | 5.5 cm | |
| 7509-33 | 6 | .054"/1.37 mm | 110 cm | 7.5 cm | braided | 5 | 5.5 cm | |
| 7509-63 | 6 | .054"/1.37 mm | 125 cm | 7.5 cm | braided | 5 | 5.5 cm | |
| 7569-63 | 6 | .059"/1.50 mm | 125 cm | 8.0 cm | non-braided | 5 | 5.5 cm | |
| 7777-D3 | 6 | .059"/1.50 mm | 110 cm | 4.8 cm | non-braided | 5 | 5.5 cm | yes |
| 7777-43 | 6 | .054"/1.37 mm | 110 cm | 4.6 cm | braided | 5 | 5.5 cm | yes |


Recommended guide wire is .038" (0.97 mm)



PERFORMA® CARDIAC MULTIPACK

The Performa Multipack combines three typical workhorse catheters into one convenient package.

| Catalogue | Frenc | h | Catheters And |
|-----------|-------|-----------------------|--|
| Number | Size | Description | Individual Catheter Number |
| | | | |
| 7751-10 | 4 | CARDIAC MULTIPACK I | PIG (braided), JL4.0, JR4.0, (7704-10, 7700-20, 7701-20) |
| | | | bumper tip |
| 7751-20 | 4 | CARDIAC MULTIPACK II | 145° PIG (braided), JL4.0, JR4.0, (7704-20, 7700-20, 7701-20) |
| | | | bumper tip |
| 7560-13 | 5 | CARDIAC MULTIPACK I | PIG (braided), JL4.0, JR4.0, (7529-11, 7521-21, 7523-21) |
| | | | |
| 7560-A3 | 5 | CARDIAC MULTIPACK I | PIG (braided), JL4.0, PRC, (7529-11, 7521-21, 7532-13) |
| 7560-23 | 5 | CARDIAC MULTIPACK II | 145° PIG (braided), JL4.0, JR4.0, (7529-23, 7521-21, 7523-21) |
| 7560-C3 | 5 | CARDIAC MULTIPACK II | 145° PIG (braided), JL4.0, PRC, (7529-23, 7521-21, 7532-13) |
| 7560-33 | 5 | CARDIAC MULTIPACK III | 155° PIG (braided), JL4.0, JR4.0, (7529-33, 7521-21, 7523-21) |
| 7560-43 | 5 | CARDIAC MULTIPACK IV | PIG (non-braided), JL4.0, JR4.0, (7602-11, 7521-21, 7523-21) |
| 7560-53 | 5 | CARDIAC MULTIPACK V | 145° PIG (non-braided), JL4.0, JR4.0, (7602-23, 7521-21, 7523-21) |
| 7560-G3 | 5 | CARDIAC MULTIPACK V | PIG (braided), JL4.0 (high flow), JR4.0, (7529-11, 7601-21, 7523-21) |
| 7560-83 | 5 | CARDIAC MULTIPACK V | 155° PIG (non-braided), JL3.5, JR4.0, (7602-33, 7521-13, 7523-21) |
| | | | |
| 7660-13 | 6 | CARDIAC MULTIPACK I | PIG (braided), JL4.0, JR4.0, (7509-11, 7501-21, 7503-21) |
| 7660-A3 | 6 | CARDIAC MULTIPACK I | PIG (braided), JL4.0, PRC, (7509-11, 7501-21, 7512-13) |
| 7660-23 | 6 | CARDIAC MULTIPACK II | 145° PIG (braided), JL4.0, JR4.0, (7509-23, 7501-21, 7503-21) |
| 7660-B3 | 6 | CARDIAC MULTIPACK II | 145° PIG (braided), JL4.0, PRC, (7509-23, 7501-21, 7512-13) |
| 7660-33 | 6 | CARDIAC MULTIPACK III | 155° PIG (braided), JL4.0, JR4.0, (7509-33, 7501-21, 7503-21) |
| 7660-43 | 6 | CARDIAC MULTIPACK IV | PIG (non-braided), JL4.0, JR4.0, (7569-11, 7501-21, 7503-21) |
| 7660-53 | 6 | CARDIAC MULTIPACK V | 145° PIG (non-braided), JL4.0, JR4.0, (7569-23, 7501-21, 7503-21) |
| 7660-63 | 6 | CARDIAC MULTIPACK VI | 155° PIG (non-braided), JL4.0, JR4.0, (7569-33, 7501-21, 7503-21) |



PERFORMA® CARDIAC MULTIPACK PLUS

The Multipack Plus combines the Prelude® and PreludePRO $^{\text{TM}}$ sheath introducers, the InQwire® diagnostic guide wire, and Performa® diagnostic cardiology catheters all in one pack for easy, one-step preparation for your angiographic cardiology procedures. Ordering a single pack saves time, space, and reduces waste.



| Catalogue | French | | Sheath (11 cm) w/.038" | Guide Wire (150 cm) 3 n .035" (.89 mm) | nm J |
|--------------|--------|---|---------------------------|---|--------|
| Number | Size | Catheters | Guide Wire | Fixed Core | Needle |
| 4MPPRO-W-S | 4 | PRC, JL4.0, Straight Pigtail | 4F PRO* | yes | |
| 4MPPRO-W-145 | 4 | JR4.0, JL4.0, 145° Pigtail | 4F PRO* | yes | |
| 5MPSW-S | 5 | JR 4.0, JL 4.0, Straight Pigtail | 5F Prelude | yes | |
| 5MPSW-145 | 5 | JR 4.0, JL 4.0, 145° Pigtail | 5F Prelude | yes | |
| 5MPS-S | 5 | JR 4.0, JL 4.0, Straight Pigtail | 5F Prelude | no | |
| 5MPS-145 | 5 | JR 4.0, JL 4.0, 145° Pigtail | 5F Prelude | no | |
| 5MPSW-SNB | 5 | JR 4.0, JL 4.0, Straight Pigtail | 5F Prelude | yes | |
| | | (non braided) | | , | |
| 5MPSW-S-18G | 5 | JR 4.0, JL 4.0, Straight Pigtail | 5F Prelude | yes | 18G |
| 5MPPROW-S | 5 | JR 4.0, JL 4.0, Straight Pigtail | 5F PRO* | yes | |
| 5MPPRO-S | 5 | JR 4.0, JL 4.0, Straight Pigtail | 5F PRO* | no | |
| 5MPPRO-145 | 5 | JR 4.0, JL 4.0, 145° Pigtail | 5F PRO* | no | |
| 5MPPRO-W-145 | 5 | JR 4.0, JL 4.0, 145° Pigtail | 5F PRO* ** | yes | |
| 5MPPROW-145 | 5 | JR 4.0, JL 4.0, 145° Pigtail | 5F PRO* | yes | |
| 6MPSW-S | 6 | JR 4.0, JL 4.0, Straight Pigtail | 6F Prelude | yes | |
| 6MPSW-145 | 6 | JR 4.0, JL 4.0, 145° Pigtail | 6F Prelude | yes | |
| 6MPS-S | 6 | JR 4.0, JL 4.0, Straight Pigtail | 6F Prelude | no | |
| 6MPS-145 | 6 | JR 4.0, JL 4.0, 145° Pigtail | 6F Prelude | no | |
| 6MPSW-S-18G | 6 | JR 4.0, JL 4.0, Straight Pigtail | 6F Prelude | yes | 18G |
| 6MPPROW-S | 6 | JR 4.0, JL 4.0, Straight Pigtail | 6F PRO* | yes | |
| 6MPPROW-145 | 6 | JR 4.0, JL 4.0, 145° Pigtail | 6F PRO* | yes | |
| | | , | - | / | |

^{*}Polypropylene (PRO) sheath tubing offers increased resilience and additional support during procedure.

Diagnostic Catheters 100 cm, Pigtails 110 cm

^{**}Contains 5F PreludePRO $^{\text{™}}$ with 0.035" guide wire.

PERFORMA® MULTIPURPOSE CATHETERS

| Catalogue | French | Internal | | Length | # Side | | | |
|-----------|--------|---------------|--------|--------|--------|-------------|------------|----------|
| Number | Size | Diameter | Length | Of Tip | Ports | Description | า | |
| | | | | | | | | |
| 7708-30 | 4 | .042"/1.07 mm | 80 cm | 5.8 cm | 2 | MULTI A2 | bumper tip | |
| 7708-40 | 4 | .042"/1.07 mm | 80 cm | 5.8 cm | 2 | MULTI B2 | bumper tip | |
| 7708-10 | 4 | .042"/1.07 mm | 100 cm | 5.8 cm | - | MULTI A1 | bumper tip | |
| 7708-20 | 4 | .042"/1.07 mm | 100 cm | 5.8 cm | 2 | MULTI A2 | bumper tip | |
| 7708-50 | 4 | .042"/1.07 mm | 100 cm | 5.8 cm | - | MULTI B1 | bumper tip | |
| 7708-60 | 4 | .042"/1.07 mm | 100 cm | 5.8 cm | 2 | MULTI B2 | bumper tip | |
| 7533-53 | 5 | .046"/1.17 mm | 80 cm | 5.8 cm | 2 | MULTI A2 | | |
| 7533-63 | 5 | .046"/1.17 mm | 80 cm | 5.8 cm | 2 | MULTI B2 | _ | |
| 7533-13 | 5 | .046"/1.17 mm | 100 cm | 5.8 cm | - | MULTI A1 | _ | |
| 7533-23 | 5 | .046"/1.17 mm | 100 cm | 5.8 cm | 2 | MULTI A2 | | |
| 7533-33 | 5 | .046"/1.17 mm | 100 cm | 5.8 cm | - | MULTI B1 | _ | |
| 7533-43 | 5 | .046"/1.17 mm | 100 cm | 5.8 cm | 2 | MULTI B2 | - | |
| | | | | | | | _ | MULTI A |
| 7513-A3 | 6 | .054"/1.37 mm | 80 cm | 5.8 cm | - | MULTI A1 | | |
| 7513-13 | 6 | .054"/1.37 mm | 80 cm | 5.8 cm | 2 | MULTI A2 | - 4 | |
| 7513-D3 | 6 | .054"/1.37 mm | 80 cm | 5.8 cm | - | MULTI B1 | | MULTI A2 |
| 7513-33 | 6 | .054"/1.37 mm | 80 cm | 5.8 cm | 2 | MULTI B2 | | _ |
| 7513-B3 | 6 | .054"/1.37 mm | 100 cm | 5.8 cm | _ | MULTI A1 | | |
| 7513-23 | 6 | .054"/1.37 mm | 100 cm | 5.8 cm | 2 | MULTI A2 | _ // | MULTI B |
| 7513-E3 | 6 | .054"/1.37 mm | 100 cm | 5.8 cm | _ | MULTI B1 | | |
| 7513-43 | 6 | .054"/1.37 mm | 100 cm | 5.8 cm | 2 | MULTI B2 | | |
| 7513-C3 | 6 | .054"/1.37 mm | 125 cm | 5.8 cm | - | MULTI A1 | _ // | MULTI E |
| 7513-53 | 6 | .054"/1.37 mm | 125 cm | 5.8 cm | 2 | MULTI A2 | - (| MOLITE |
| 7513-F3 | 6 | .054"/1.37 mm | 125 cm | 5.8 cm | - | MULTI B1 | | |
| 7513-63 | 6 | .054"/1.37 mm | 125 cm | 5.8 cm | 2 | MULTI B2 | _ | |

Recommended guide wire is .038" (0.97 mm)


PERFORMA® SONES CATHETERS

| Catalogue | French | Internal | | Length | # Side | | | |
|-----------|--------|---------------|--------|--------|--------|-------------|------------|----|
| Number | Size | Diameter | Length | Of Tip | Ports | Description | | |
| 7705-10 | 4 | .042"/1.07 mm | 80 cm | 7.3 cm | 4 | SONES | bumper tip | |
| 7705-20 | 4 | .042"/1.07 mm | 100 cm | 7.3 cm | 4 | SONES | bumper tip | |
| 7530-13 | 5 | .046"/1.17 mm | 80 cm | 7.3 cm | 4 | SONES | | |
| 7530-23 | 5 | .046"/1.17 mm | 100 cm | 7.3 cm | 4 | SONES | • | |
| 7520-13 | 6 | .054"/1.37mm | 80 cm | 7.3 cm | 4 | SONES | | SO |
| 7520-23 | 6 | .054"/1.37mm | 100 cm | 7.3 cm | 4 | SONES | | |

RBR

PERFORMA® INTERNAL MAMMARY LEFT BRACHIAL / RADIAL CATHETERS


| Catalogue Number | French Size | Internal Diameter Length | | Length Of Tip | | | |
|---------------------|----------------|--------------------------|--------|------------------|---------|------------|--|
| 7242-10 | 4 | .042"/1.07 mm | 100 cm | 4.2 cm | I MLBR1 | bumper tip | |
| 7242-20 | 4 | .042"/1.07 mm | 100 cm | 4.2 cm | I MLBR2 | bumper tip | |



Recommended guide wire is .038" (0.97 mm)

PERFORMA® LEFT CORONARY BRACHIAL / RADIAL CATHETERS

| Catalogue Number | French Size | Internal Diameter | - | | Descript | ion |
|---------------------|----------------|----------------------|----------|--------|----------|------------|
| 7240-10 | 4 | .042"/1.07 mm | 100 cm | 3.4 cm | LBRI | bumper tip |
| 7240-20 | 4 | .042"/1.07 mm | 100 cm | 3.4 cm | LBR2 | bumper tip |
| 7240-30 | 4 | .042"/1.07 mm | 100 cm | 6.0 cm | LBR3 | bumper tip |



Recommended guide wire is .038" (0.97 mm)

PERFORMA® RIGHT CORONARY BRACHIAL / RADIAL CATHETER

| Catalogue Number | French Internal Size Diameter Lei | | Length | Length Of Tip | Descrip | Description | |
|---------------------|--------------------------------------|---------------|--------|------------------|---------|-------------|--|
| 7241-10 | 4 | .042"/1.07 mm | 100 cm | 3.4 cm | RBR | bumper tip | |

Recommended guide wire is .038" (0.97 mm)

.

MIV™ RADIAL PIGTAIL VENTRICULOGRAM CATHETERS

Designed to angle toward the left cusp from the radial approach, the innovative MIV Radial Pigtail Ventriculogram Catheter facilitates easier insertion into the ventricle.

| Catalogue | French | | # Of | |
|-------------|--------|--------|------------|-------------|
| Number | Size | Length | Side Ports | Description |
| | | | | |
| 4RPS110 | 4 | 110 cm | 6 | braided |
| 4RPS125 | 4 | 125 cm | 6 | braided |
| 4RPL125 | 4 | 125 cm | 6 | braided |
| 4RPL110 | 4 | 110 cm | 6 | braided |
| 4RPS110-NB | 4 | 110 cm | 6 | non braided |
| 4RPS125-NB | 4 | 125 cm | 6 | non braided |
| 4RPL125-NB | 4 | 125 cm | 6 | non braided |
| 4RPL110-NB | 4 | 110 cm | 6 | non braided |
| | | | | |
| 5RPS110 | 5 | 110 cm | 6 | braided |
| 5RPS125 | 5 | 125 cm | 6 | braided |
| 5RPL110 | 5 | 110 cm | 6 | braided |
| 5RPL125 | 5 | 125 cm | 6 | braided |
| 5RPS110- NB | 5 | 110 cm | 6 | non braided |
| 5RPS125-NB | 5 | 125 cm | 6 | non braided |
| 5RPL110-NB | 5 | 110 cm | 6 | non braided |
| 5RPL125-NB | 5 | 125 cm | 6 | non braided |
| | | | | |
| 6RPS110 | 6 | 110 cm | 6 | braided |
| 6RPS125 | 6 | 125 cm | 6 | braided |
| 6RPL110 | 6 | 110 cm | 6 | braided |
| 6RPL125 | 6 | 125 cm | 6 | braided |
| 6RPS110- NB | 6 | 110 cm | 6 | non braided |
| 6RPS125-NB | 6 | 125 cm | 6 | non braided |
| 6RPL110-NB | 6 | 110 cm | 6 | non braided |
| 6RPL125-NB | 6 | 125 cm | 6 | non braided |
| | | | | |





The MIV Radial Ventriculogram Catheters are designed to angle toward the left cusp from the radial approach, facilitating easier insertion into the ventricle.

PERFORMA® RADIAL MULTIPACK PLUS

The Multipack Plus combines the Prelude® Sheath Introducer, the InQwire® diagnostic guide wire, and the Performa® diagnostic cardiology catheter all in one pack for easy, one-step preparation for your procedure. Ordering a single pack saves time, space, and reduces waste.

| Catalogue Number | French | Prelude Sheath | Side Holes | Description |
|---------------------|--------|-------------------|---------------|----------------|
| Number | Size | Sneath | noies | Description |
| RADMPP-1 | 5 | 7 cm | | ULT 1 |
| RADMPP-2 | 5 | 11 cm | | ULT 1 |
| RADMPP-3 | 5 | 7 cm | 1 | ULT 1 |
| RADMPP-4 | 5 | 7 cm | | ULT 1 |
| RADMPP-5 | 5 | 11 cm | | ULT 1 |
| RADMPP-6 | 5 | 7 cm | 1 | ULT 1 |
| RADMPP-7 | 5 | 7 cm | | JL 3.5, JR 4.0 |
| RADMPP-8 | 5 | 11 cm | | JL 3.5, JR 4.0 |
| RADMPP-9 | 5 | 7 cm | | JL 3.5, JR 4.0 |
| RADMPP-10 | 5 | 11 cm | | JL 3.5, JR 4.0 |
| RADMPP-11 | 5 | 7 cm | | ULT 4T-40 |
| RADMPP-12 | 5 | 11 cm | | ULT 4T-40 |

InQwire guide wire 0.035" (0.89 mm) x 180 cm/Fixed Core 3 mm J

PERFORMA ULTIMATE™ ANGIOGRAPHIC CATHETERS

The Performa Ultimate angiographic catheter comes in four shapes designed for the radial approach. Place the catheter once to access both the right and left coronary arteries.


| Catalogue | French | Internal | | Length | # Side | |
|-------------------------------|--------------|------------------|--------|--------|--------|-------------|
| Number | Size | Diameter | Length | Of Tip | Ports | Description |
| | | | | | | |
| ULTIMATE 1 | | | | | | |
| (4 cm between pr | imary and se | econdary curve) | | | | |
| 410038ULT1 | 4 | .042" / 1.07 mm | 100 cm | 2.0 cm | - | bumper tip |
| 4100381ULT1 | 4 | .042" / 1.07 mm | 100 cm | 2.0 cm | 1 | bumper tip |
| 510038ULT1 | 5 | .046" / 1.17 mm | 100 cm | 2.0 cm | - | bumper tip |
| 5100381ULT1 | 5 | .046" / 1.17 mm | 100 cm | 2.0 cm | 1 | bumper tip |
| 5110381ULT1 | 5 | .046" / 1.17 mm | 110 cm | 2.0 cm | 1 | |
| 610038ULT1 | 6 | .054" / 1.37 mm | 100 cm | 2.0 cm | - | |
| 6100381ULT1 | 6 | .054" / 1.37 mm | 100 cm | 2.0 cm | 1 | |
| 6110381ULT1 | 6 | .054" / 1.37 mm | 110 cm | 2.0 cm | 1 | |
| ULTIMATE 2 (3.5 cm between | primary and | secondary curve) | | | | |
| 410038ULT2 | 4 | .042" / 1.07 mm | 100 cm | 2.0 cm | - | bumper tip |
| 4100381ULT2 | 4 | .042" / 1.07 mm | 100 cm | 2.0 cm | 1 | bumper tip |
| 510038ULT2 | 5 | .046" / 1.17 mm | 100 cm | 2.0 cm | - | bumper tip |
| 5100381ULT2 | 5 | .046" / 1.17 mm | 100 cm | 2.0 cm | 1 | bumper tip |
| 5110381ULT2 | 5 | .046" / 1.17 mm | 110 cm | 2.0 cm | 1 | · · · |
| 610038ULT2 | 6 | .054" / 1.37 mm | 100 cm | 2.0 cm | - | |
| 6100381ULT2 | 6 | .054" / 1.37 mm | 100 cm | 2.0 cm | 1 | |
| 6110381ULT2 | 6 | .054" / 1.37 mm | 110 cm | 2.0 cm | 1 | |
| ULTIMATE 3 (4 cm between pr | imary and se | econdary curve) | | | | |
| 410038ULT3 | 4 | .042" / 1.07 mm | 100 cm | 2.0 cm | - | bumper tip |
| 4100382ULT3 | 4 | .042" / 1.07 mm | 100 cm | 2.0 cm | 2 | bumper tip |
| 510038ULT3 | 5 | .046" / 1.17 mm | 100 cm | 2.0 cm | - | bumper tip |
| 5100382ULT3 | 5 | .046" / 1.17 mm | 100 cm | 2.0 cm | 2 | bumper tip |
| 610038ULT3 | 6 | .054" / 1.37 mm | 100 cm | 2.0 cm | - | |
| 6100382ULT3 | 6 | .054" / 1.37 mm | 100 cm | 2.0 cm | 2 | |
| | | | | | | |

Recommended guide wire is .038" (0.97 mm)

.054" / 1.37 mm

6

6110382ULT3

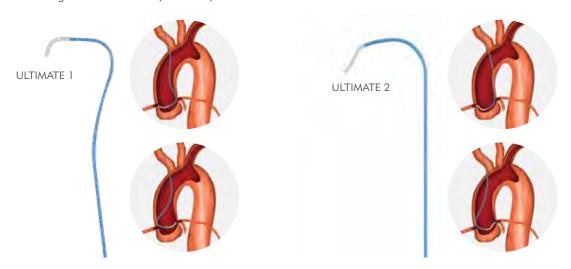

110 cm


2.0 cm

2

PERFORMA ULTIMATE™ ANGIOGRAPHIC CATHETERS

| Catalogue Number | French Size | Internal Diameter | Length | Length Of Tip | # Side Ports | Description |
|----------------------|----------------|----------------------|--------|------------------|-----------------|-------------|
| . (3.11.2-5. | | 2.4 | g | p | | |
| ULTIMATE 4 | | | | | | |
| (4 cm between primar | y and seco | ndary curve) | | | | |
| 410038ULT4-T40 | 4 | .042" / 1.07 mm | 100 cm | 2.0 cm | - | bumper tip |
| 4100381ULT4-T40 | 4 | .042" / 1.07 mm | 100 cm | 2.0 cm | 1 | bumper tip |
| 510038ULT4-T40 | 5 | .046" / 1.17 mm | 100 cm | 2.0 cm | - | bumper tip |
| 5100381ULT4-T40 | 5 | .046" / 1.17 mm | 100 cm | 2.0 cm | 1 | bumper tip |
| 5110381ULT4-T40 | 5 | .046" / 1.17 mm | 110 cm | 2.0 cm | 1 | |
| 610038ULT4-T40 | 6 | .054" / 1.37 mm | 100 cm | 2.0 cm | - | |
| 6100381ULT4-T40 | 6 | .054" / 1.37 mm | 100 cm | 2.0 cm | 1 | |
| 6110381ULT4-T40 | 6 | .054" / 1.37 mm | 110 cm | 2.0 cm | 1 | |
| | | | | | | |
| (4.5 cm between prim | ary and sec | condary curve) | | | | |
| 410038ULT4-T45 | 4 | .042" / 1.07 mm | 100 cm | 2.0 cm | - | bumper tip |
| 4100381ULT4-T45 | 4 | .042" / 1.07 mm | 100 cm | 2.0 cm | 1 | bumper tip |
| 510038ULT4-T45 | 5 | .046" / 1.17 mm | 100 cm | 2.0 cm | - | bumper tip |
| 5100381ULT4-T45 | 5 | .046" / 1.17 mm | 100 cm | 2.0 cm | 1 | bumper tip |
| 5110381ULT4-T45 | 5 | .046" / 1.17 mm | 110 cm | 2.0 cm | 1 | |
| 610038ULT4-T45 | 6 | .054" / 1.37 mm | 100 cm | 2.0 cm | - | |
| 6100381ULT4-T45 | 6 | .054" / 1.37 mm | 100 cm | 2.0 cm | 1 | |
| 6110381ULT4-T45 | 6 | .054" / 1.37 mm | 110 cm | 2.0 cm | 1 | |

Recommended guide wire is .038" (0.97 mm)

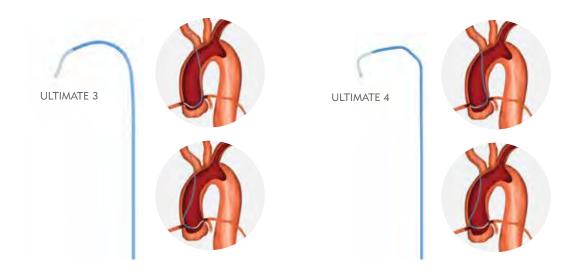

IMPRESS® MATERIAL CATHETERS

| Catalogue Number | French Size | Internal Diameter | Length | Length Of Tip | # Side Ports | Description |
|-----------------------------|----------------|----------------------|--------|------------------|-----------------|-------------|
| ULTIMATE 1 5IMP10038ULT1 | 5 | .046" / 1.17 mm | 100 cm | 2.0 cm | - | ULTIMATE 1 |
| 5IMP100381ULT1 | 5 | .046" / 1.17 mm | 100 cm | 2.0 cm | 1 | ULTIMATE 1 |



PERFORMA® PAEDIATRIC JUDKINS RIGHT & LEFT CATHETERS

| Catalogue Number | French Size | Internal | 1 41- | Length | Diti | |
|---------------------|----------------|---------------|--------|--------|-----------|------------|
| Number | Size | Diameter | Length | Of Tip | Descripti | ion |
| 7700-A0 | 4 | .042"/1.07 mm | 70 cm | 2.0 cm | JL 1.5 | bumper tip |
| 7700-B0 | 4 | .042"/1.07 mm | 70 cm | 2.0 cm | JL 2.0 | bumper tip |
| 7700-C0 | 4 | .042"/1.07 mm | 70 cm | 2.0 cm | JL 2.5 | bumper tip |
| 7700-D0 | 4 | .042"/1.07 mm | 70 cm | 2.0 cm | JL 3.0 | bumper tip |
| 7701-A0 | 4 | .042"/1.07 mm | 70 cm | 2.0 cm | JR 1.5 | bumper tip |
| 7701-B0 | 4 | .042"/1.07 mm | 70 cm | 2.0 cm | JR 2.0 | bumper tip |
| 7701-C0 | 4 | .042"/1.07 mm | 70 cm | 2.0 cm | JR 2.5 | bumper tip |
| 7701-D0 | 4 | .042"/1.07 mm | 70 cm | 2.0 cm | JR 3.0 | bumper tip |
| 7521-L3 | 5 | .046"/1.17 mm | 70 cm | 2.0 cm | JL 1.5 | bumper tip |
| 7521-M3 | 5 | .046"/1.17 mm | 70 cm | 2.0 cm | JL 2.0 | bumper tip |
| 7521-N3 | 5 | .046"/1.17 mm | 70 cm | 2.0 cm | JL 2.5 | bumper tip |
| 7521-P3 | 5 | .046"/1.17 mm | 70 cm | 2.0 cm | JL 3.0 | bumper tip |
| 7523-L3 | 5 | .046"/1.17 mm | 70 cm | 2.0 cm | JR 1.5 | bumper tip |
| 7523-M3 | 5 | .046"/1.17 mm | 70 cm | 2.0 cm | JR 2.0 | bumper tip |
| 7523-N3 | 5 | .046"/1.17 mm | 70 cm | 2.0 cm | JR 2.5 | bumper tip |
| 7523-P3 | 5 | .046"/1.17 mm | 70 cm | 2.0 cm | JR 3.0 | bumper tip |
| | J | R 1.5 | • | JL 1.5 | | JL |
| | J | R 2.0 | | | | |
| | | _ | | JR 3.0 | | |
| | | Į. | | | | JL |
| | | | | | | |

Recommended guide wire is .038" (0.97 mm)

PAEDIATRIC PIGTAIL CATHETERS, FEP

Merit Medical's FEP (Fluorinated Ethylene Propylene) Teflon Angiographic Pigtail catheters provide softness, control, and superior imaging. For heart patients ranging from newborn to adult, these catheters are available in 3F to 7F sizes, and 40 cm to 100 cm lengths.

| Catalogue | French | Internal | | Recommended | # Side |
|--------------|--------|---------------|--------|-----------------|--------|
| Number | Size | Diameter | Length | Guide Wire | Ports |
| | | | | | |
| 1310-21-0043 | 3 | .027"/.69 mm | 40 cm | .021" (0.53 mm) | 4 |
| 1310-21-0053 | 3 | .027"/.69 mm | 50 cm | .021" (0.53 mm) | 4 |
| 1310-21-0054 | 4 | .040"/1.02 mm | 50 cm | .021" (0.53 mm) | 4 |
| 1310-21-0064 | 4 | .040"/1.02 mm | 65 cm | .021" (0.53 mm) | 4 |
| 1310-25-0054 | 4 | .040"/1.02 mm | 50 cm | .025" (0.64 mm) | 4 |
| 1310-25-0064 | 4 | .040"/1.02 mm | 65 cm | .025" (0.64 mm) | 4 |
| 1310-25-0084 | 4 | .040"/1.02 mm | 80 cm | .025" (0.64 mm) | 4 |
| 1310-25-0065 | 5 | .046"/1.17 mm | 60 cm | .025" (0.64 mm) | 4 |
| 1310-25-0085 | 5 | .046"/1.17 mm | 80 cm | .025" (0.64 mm) | 4 |
| | | | | | |
| 1308-25-0085 | 5 | .046"/1.17 mm | 80 cm | .025" (0.64 mm) | 6 |
| 1308-35-0065 | 5 | .046"/1.17 mm | 65 cm | .035" (0.89 mm) | 6 |
| 1308-35-0085 | 5 | .046"/1.17 mm | 80 cm | .035" (0.89 mm) | 6 |
| 1308-35-0005 | 5 | .046"/1.17 mm | 100 cm | .035" (0.89 mm) | 6 |
| 1308-35-0086 | 6 | .056"/1.42 mm | 80 cm | .035" (0.89 mm) | 6 |
| 1308-35-0006 | 6 | .056"/1.42 mm | 100 cm | .035" (0.89 mm) | 6 |
| 1308-38-0006 | 6 | .056"/1.42 mm | 100 cm | .038" (0.97 mm) | 6 |
| 1308-35-0007 | 7 | .065"/1.65 mm | 100 cm | .035" (0.89 mm) | 6 |
| 1308-38-0007 | 7 | .065"/1.65 mm | 100 cm | .038" (0.97 mm) | 6 |




PERFORMA® STANDARD PAEDIATRIC AND INFANT PIGTAIL CATHETERS (NYLON)

| Catalogue | French | Internal | | Length | # Side | |
|-----------|--------|---------------|--------|--------|--------|----------------------|
| Number | Size | Diameter | Length | Of Tip | Ports | Description |
| | | | | | | |
| 7756-10 | 4 | .041"/1.04 mm | 65 cm | 6.0 cm | 5 | standard non-braided |
| 7756-20 | 4 | .041"/1.04 mm | 80 cm | 6.0 cm | 5 | standard non-braided |
| 7757-10 | 4 | .041"/1.04 mm | 65 cm | 5.5 cm | 4 | infant non-braided |
| 7757-20 | 4 | .041"/1.04 mm | 80 cm | 5.5 cm | 4 | infant non-braided |



Recommended guide wire is .035" (0.89 mm)

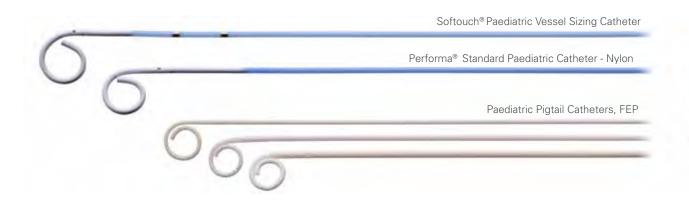

SOFTOUCH® PAEDIATRIC VESSEL SIZING CATHETERS

Merit Medical's Paediatric (11 mm pigtail curl) Vessel Sizing Catheters are designed to provide accurate measurement of paediatric anatomy. The catheters offer excellent flow rates, 1200 psi rating, 5 spiral holes, and highly visible platinum marker bands for a precise measurement tool.

| Catalogue | French | Internal | | # of Side | Bands and | |
|-------------|--------|---------------|--------|-----------|----------------|-------------|
| Number | Size | Diameter | Length | Ports | Spacing | Description |
| 4408-2M65 | 4 | .041"/1.04 mm | 65 cm | 5 | 2 (1 cm apart) | Pigtail |
| 4408-2M80 | 4 | .041"/1.04 mm | 80 cm | 5 | 2 (1 cm apart) | Pigtail |
| 4408-2M65SH | 4 | .041"/1.04 mm | 65 cm | 5 | 2 (1 cm apart) | Pigtail |
| 4408-2M80SH | 4 | .041"/1.04 mm | 80 cm | 5 | 2 (1 cm apart) | Pigtail |



INQWIRE® GUIDE WIRES

The InQwire guide wire is precoated with PTFE over the entire wire surface for smooth, consistent coverage that resists flaking. Less friction means increased trackability, lubricity, and durability. Its precise J-tip memory does not require reloading the J straightener, and the tight guide wire tolerances ensure catheter and sheath compatibility.



| Catalogue | | | | | |
|--------------|-------------|------------------|--------|-------|-----------|
| Number | Description | Size | Length | Core | # Per Box |
| IQ35F150J3 | 3 mm J | 0.035" (0.89 mm) | 150 cm | Fixed | 10 |
| IQ35F210J3 | 3 mm J | 0.035" (0.89 mm) | 210 cm | Fixed | 10 |
| IQ35F210J1O5 | 1.5mm J | 0.035" (0.89 mm) | 210 cm | Fixed | 10 |

More options available through Merit's Peripheral Intervention catalogue. Ask for more details.

MERIT LAUREATE® HYDROPHILIC GUIDE WIRES

The Merit Laureate hydrophilic guide wire facilitates the placement of devices during diagnostic and interventional procedures. Its torque control, turn-for-turn responsiveness, and lesion crossability demonstrates high performance in navigating tortuous vessels. The hydrophilic coating offers enduring lubricity and consistent surface coating adhesion. The Merit Laureate was designed to reduce wire whipping, minimise friction, and to promote rapid catheter exchanges.



| | ' | | | | | |
|-------------|-----------------|------------------|--------|-------|---|--|
| | | | | | | |
| LWSTDA3580 | Standard/Angled | 0.035" (0.89 mm) | 80 cm | Fixed | 5 | |
| LWSTDA35150 | Standard/Angled | 0.035" (0.89 mm) | 150 cm | Fixed | 5 | |
| LWSTDA35180 | Standard/Angled | 0.035" (0.89 mm) | 180 cm | Fixed | 5 | |
| LWSTDA35220 | Standard/Angled | 0.035" (0.89 mm) | 220 cm | Fixed | 5 | |

More options available through Merit's Peripheral Intervention catalogue. Ask for more details.

H2O TORQ™ TORQUE DEVICE

The H2O Torq is an ergonomic torque device operable with one hand, designed to enhance manipulation of the guide wire tip. The single component plastic design can be used on hydrophilic or PTFE-coated wires and allows easy reposition and removal for rapid device exchanges. Packaged individually, 10 units per box.



| Catalogue Number | Description |
|------------------|--|
| TD100 | Orange device; Guide wires from .025" (0.64 mm) to .040" (1.02 mm) |
| TD200 | Yellow device; Guide wires from .010" (0.25mm) to .020" (0.51mm) |

SEADRAGON™ TORQUE DEVICE

The SeaDragon is an ergonomic torque device operable with one hand, designed to enhance manipulation of the guide wire tip. The single component plastic design can be used on hydrophilic or PTFE-coated wires and allows easy reposition and removal for rapid device exchanges. Packaged individually, 10 units per box.



| Catalogue Number | Description |
|------------------|---|
| TD500 | Guide wires from .018" (0.46 mm) to .038" (0.97 mm) |

MISER® CONTRAST MANAGEMENT SYSTEMS

The Miser Contrast Management System's exclusive orange ball and burette design prevents air from entering fluid lines during angiography, ensuring patient safety. The dual one-way check valve's microbial barrier blocks cross contamination. Automatic refill during each contrast withdrawal allows for quick and easy preparation.

MISER CONTRAST MANAGEMENT SYSTEM

Includes 72" (183 cm) distal tubing, 2 one-way check valves, 30 mL burette, air-inlet valve. Configurations available with and without a distal stopcock and with large or small bore distal tubing. Packaged 10 units per box, 4 boxes per case.

Catalogue Number Description MISER1 Large Bore Tubing without Stopcock MISER2 Large Bore Tubing with Stopcock MISER3 Small Bore Tubing without Stopcock MISER4 Small Bore Tubing with Stopcock



Includes large bore piercing spike, 30 mL burette, air-inlet valve, large bore distal 3-way stopcock with female Luers. MUST BE USED IN CONJUNCTION WITH K08-00422D (shown below). Packaged 10 units per box, 4 boxes per case.







MERIT IN-LINE CONTRAST MANAGEMENT SYSTEM

Includes 54" (137 cm) large bore tubing, 2 one-way check valves, standard pressure 3-way stopcock and fixed male Luers. Packaged 10 units per box, 4 boxes per case.

Catalogue Number K08-00422D



CONTRAST MANAGEMENT SYSTEMS

Spike with large bore tubing, bonded Marquis® Stopcock and vented sideport protectors. Packaged 25 units per box, 4 boxes per case.

Catalogue Number

K08-02438


Vented spike, large bore with user-selectable vent. 1" large bore tubing, 1-way stopcock with distal female Luer.



Catalogue Number

K08-02384


Vented spike, large bore with user-selectable vent. 2" large bore tubing, 3-way stopcock with distal female Luer.



Catalogue Number

K08-00417B


Vented spike, large bore with user-selectable vent. 6.5" large bore tubing, 3-way stopcock with distal female Luer.



Catalogue Number

K08-00077B


Vented spike, large bore with user-selectable vent. 2" large bore tubing, 1-way stopcock with distal male Luer.



Catalogue Number

K08-00078A

Vented spike, large bore with user-selectable vent. 2" large bore tubing, 1-way stopcock with distal male Luer.




CONTINUED

CONTRAST MANAGEMENT SYSTEMS

Catalogue Number

K08-00577

Macro Drip Chamber with filter, large bore, with 6.5" large bore tubing, 3-way stopcock with distal female Luer.



Catalogue Number

K08-01878B


Merit CT Contrast Management spike with 20" (50 cm) large bore tubing, large bore vented spike, dual check valve, tubing pinch clamp, and fixed male Luer. Packaged 20 units per box, 4 boxes per case.



Catalogue Number

K08-00719


Vented spike, large bore with vent. 1" large bore tubing, 3-way stopcock with distal female Luer.



FLUID ADMINISTRATION SETS

Merit offers a large variety of products for fluid delivery, including simple, single-line spike systems, complex multiple-line drip chambers with bifurcated or trifurcated lines, and large and small bore tubing with roller clamps or slide clamps. Products are available with micro- or macro-drip chambers, and with or without a micro filter. Custom fluid administration sets available.

FLUID ADMINISTRATION SET with user-selectable vented macro-drip chamber and small bore tubing. Packaged 25 units per box, 4 boxes per case.

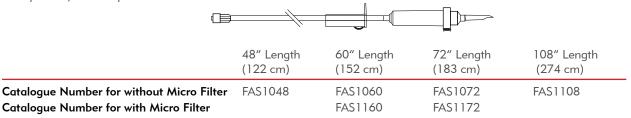

FLUID ADMINISTRATION SET with non-vented macro-drip chamber, micro filter and small bore tubing. Packaged 25 units per box, 4 boxes per case.




| | 60" Length (152 cm) | 72" Length (183 cm) | |
|------------------|------------------------|------------------------|--|
| Catalogue Number | FAS1260 | FAS1272 | |

FLUID ADMINISTRATION SET with user-selectable vented spike. Packaged 25 units per box, 4 boxes per case.



| | 48" Length (122 cm) | 60" Length (152 cm) | 72" Length (183 cm) | 108" Length (274 cm) |
|--|------------------------|------------------------|------------------------|-------------------------|
| Catalogue Number for Small Bore Tubing | FAS4048 | FAS4060 | FAS4072 | FAS4108 |
| Catalogue Number for Large Bore Tubing | FAS5048 | FAS5060 | FAS5072 | FAS5108 |

FLUID ADMINISTRATION SET with spike and large bore tubing. Packaged 25 units per box, 4 boxes per case.

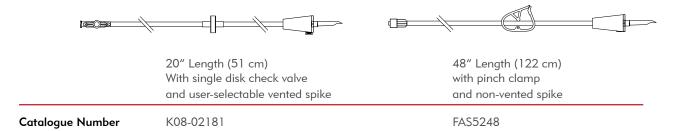


CONTINUED

FLUID ADMINISTRATION SETS

FLUID ADMINISTRATION SPIKE with user-selectable vent, 1" (2.5 cm) small bore tubing and port protectors. Packaged 25 units per box, 4 boxes per case.



FLUID ADMINISTRATION SET with vented macro-drip chamber with ball, 72" large bore tubing. Single-patient use for fluid or contrast management. Packaged 25 units per box, 4 boxes per case.




FLUID MANAGEMENT TUBE 20" (50 cm) small bore tubing with small bore male slip Luer. Packaged 15 units per box, 4 boxes per case.



Catalogue Number K08-01859

FLUID ADMINISTRATION SET with user-selectable vented macro-drip chamber, micro filter, roller clamps and small bore tubing. Packaged 25 units per box, 4 boxes per case.

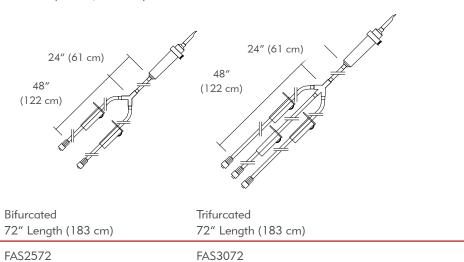


43

Catalogue Number

FLUID ADMINISTRATION SETS

FLUID ADMINISTRATION SET with user-selectable vented spike, roller clamps and small bore tubing. Packaged 25 units per box, 4 boxes per case.



Bifurcated 72" Length (183 cm)

Catalogue Number

FAS6072




HIGH PRESSURE TUBING

Merit offers three specific material configurations ranging from highly flexible polyurethane to clear PVC to meet your specific pressure needs. Merit's high pressure tubing configurations offer both a fixed male connector and a rotating adapter connector.

CONTRAST INJECTION TUBING, POLYURETHANE, FLEXIBLE BRAIDED


Rated at 1200 psi (83 bar). Packaged coiled, 25 units per box, 4 boxes per case.



| Male to Female | 10" Length (25 cm) | 20" Length (51 cm) | 30" Length (76 cm) | 48" Length (122 cm) | 60" Length (152 cm) | 72" Length (183 cm) |
|--------------------------|-----------------------|-----------------------|-----------------------|------------------------|------------------------|------------------------|
| Airless Rotating Adapter | HPF100E | HPF200E | HPF300E | HPF480E | | HPF720E |
| With KEEP™ Tubing Clip | | HPF200K | HPF300K | HPF480K | HPF600K | HPF720K |
| Fixed Male Connector | HPF101E | HPF201E | HPF301E | HPF481E | | HPF721E |
| With KEEP Tubing Clip | | HPF201K | HPF301K | HPF481K | HPF601K | HPF721K |

CONTRAST INJECTION TUBING, PVC, CLEAR

Rated at 1200, 900 and 500 psi (83, 62 and 34 bar). Packaged straight, 25 units per box, 4 boxes per case.




| Male to Female | 10" Length (25 cm) | 20" Length (51 cm) | 30" Length (76 cm) | 48" Length (122 cm) | 59" Length (150 cm) | 72" Length (183 cm) |
|--------------------------|-----------------------|-----------------------|-----------------------|------------------------|------------------------|------------------------|
| Airless Rotating Adapter | | | | | | |
| 1200 psi (83 bar) | HPT100E | HPT200E | HPT300E | HPT480E | HPT590E | |
| 900 psi (62 bar) | HP9100E | HP9200E | HP9300E | HP9480E | | HP9720E |
| 500 psi (34 bar) | HP5100E | HP5200E | HP5300E | HP5480E | | |
| Fixed Male Connector | | | | | | |
| 1200 psi (83 bar) | HPT101E | HPT201E | HPT301E | HPT481E | HPT591E | |

| 1200 psi (83 bar) | HPT101E | HPT201E | HPT301E | HPT481E | HPT591E | |
|-------------------|---------|---------|---------|---------|---------|---------|
| 900 psi (62 bar) | HP9101E | HP9201E | HP9301E | HP9481E | | HP9721E |
| 500 psi (34 bar) | HP5101E | HP5201E | HP5301E | HP5481E | | |

CONTRAST INJECTION TUBING, FLEXIBLE, NYLON / POLYURETHANE, EXCITE™

Rated at 1200 psi (83 bar). Packaged straight, 25 units per box, 4 boxes per case.





| Male to Female | 10" Length (25 cm) | 20" Length (51 cm) | 30" Length (76cm) | 39" Length (100 cm) | _ | 59" Length (150 cm) | _ |
|-----------------------------|-----------------------|-----------------------|----------------------|------------------------|---------|------------------------|---------|
| Airless Rotating Adapter | HPC100E | HPC200E | HPC300E | HPC390E | HPC480E | HPC590E | HPC720E |
| Fixed Male Connector | HPC101E | HPC201E | HPC301E | HPC391E | HPC481E | HPC591E | HPC721E |


PRESSURE MONITORING TUBING

PRESSURE MONITORING TUBING PVC, RIGID NON-EXPANDING

Packaged coiled, 25 units per box, 4 boxes per case.

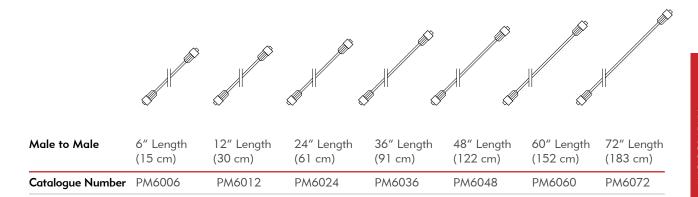


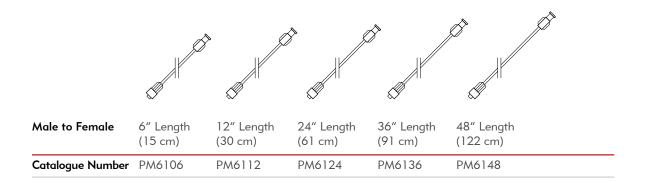

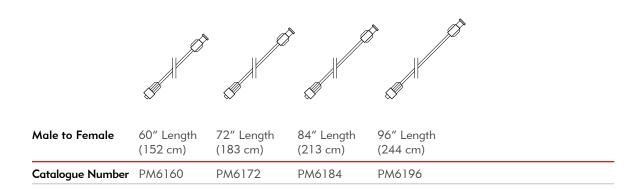

PIB - PRESSURE INFUSOR BAGS™

Nylon bags for pressurisation of fluids. Dual-setting pressure relief valve easily switches between standard and overpressure mode with the click of a button (PIB500 and PIB1000 only).

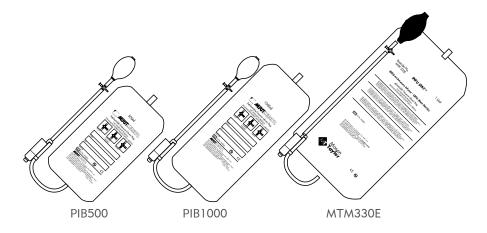


| Catalogue Numbers | Description | | | |
|-------------------|-------------|-------------------------|--|--|
| PIB500 | 500 mL | 12 per box, 48 per case | | |
| PIB1000 | 1000 mL | 12 per box, 48 per case | | |
| MTM330E | 3000 mL | 2 per box, 10 per case | | |



MERIT® MANIFOLDS

Merit Manifolds have been designed to meet numerous clinician preferences. The clean polycarbonate material allows easy visibility for de-bubbling, and the handles have been designed for ease of torque. In addition, options include one to five port, 200 psi or 500 psi, 6" (15 cm) extension tubing and rotating Luer, and block body or half body styles. Packaged 25 units per box, 4 boxes per case.

MANIFOLDS WITH RIGHT PORT ORIENTATION AND ROTATING LUER

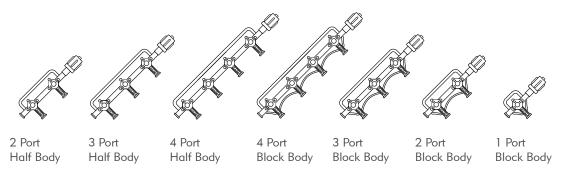

200 PSI (14 BAR)


| ON Handles | 202HN-R | 203HN-R | 204HN-R | 204BN-R | 203BN-R | 202BN-R |
|-----------------|-----------|-----------|-----------|----------|----------|---------|
| Wide Port | 202LHWN-R | 203LHWN-R | 204LHWN-R | | | |
| OFF Handles | 202HF-R | 203HF-R | 204HF-R | 204BF-R | 203BF-R | 202BF-R |
| Wide Port | 202LHWF-R | 203LHWF-R | 204LHWF-R | | | |
| 360/OFF Handles | 3 | | | 204BF-RT | 203BF-RT | |
| 360/ON Handles | | | | | 203BN-RT | |

500 PSI (34 BAR)

| ON Handles | 502HN-R | 503HN-R | 504HN-R | 504BN-R | 503BN-R | 502BN-R | 501BN-R |
|--------------------------|-----------|-----------|-----------|---------|----------|---------|---------|
| Wide Port | 502LHWN-R | 503LHWN-R | 504LHWN-R | | | | |
| 360/ON Handles | | 503HN-RT | | | | | |
| OFF Handles | 502HF-R | 503HF-R | 504HF-R | 504BF-R | 503BF-R | 502BF-R | 501BF-R |
| Wide Port | 502LHWF-R | 503LHWF-R | 504LHWF-R | | | | |
| 360/OFF Handles 502HF-RT | | | | | 503BF-RT | | |


MANIFOLDS WITH LEFT PORT ORIENTATION AND ROTATING LUER

Packaged 25 units per box, 4 boxes per case.

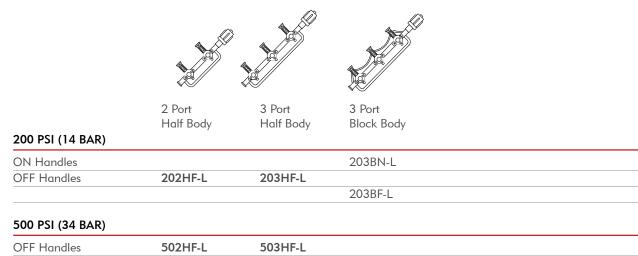

MANIFOLDS WITH ALL FEMALE PORTS

Packaged 25 units per box, 4 boxes per case.



2 Port Half Body



3 Port

Half Body

3 Port Block Body



4 Port 5 Port Block Body Block Body

200 PSI (14 BAR)


| ON Handles | | | 203BN-F | | |
|-----------------|---------|---------|----------|----------|----------|
| OFF Handles | 202HF-F | 203HF-F | | | 205BF-F |
| 360/OFF Handles | | | 203BF-FT | 204BF-FT | 205BF-FT |

500 PSI (34 BAR)

| OFF Handles | 503BF-F |
|-------------|---------|
|-------------|---------|



MANIFOLDS WITH RIGHT PORT ORIENTATION, 6" (15 CM) TUBING EXTENSION AND ROTATING LUER

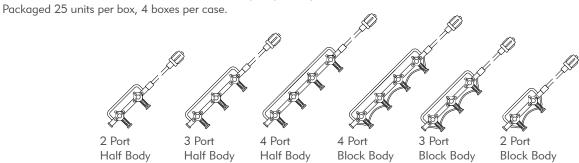

200 PSI (14 BAR)


| ON Handles | 202HN-RX | 203HN-RX | | |
|-----------------|----------|----------|----------|-----------|
| OFF Handles | 202HF-RX | 203HF-RX | 204HF-RX | 203BF-RX |
| 360/OFF Handles | | | | 203BF-RXT |

500 PSI (34 BAR)

| ON Handles | | 503HN-RX | | | 502BN-RX |
|----------------|-----------|----------|----------|-----------|----------|
| OFF Handles | 502LHWF-R | 503HF-RX | 504HF-RX | 503BF-RX | 502BF-RX |
| 360/OFF Handle | es | | | 503BF-RXT | |

DEVOS™ MANIFOLDS

Devos Manifolds with check relief valve, right port orientation and rotating Luer. $TRAM^{\otimes}$ and $TRAM-P^{\top}$ ports have the added benefit of an integrated transducer on the port closest to the rotating adapter with comfortable wide-spaced finger grips. Packaged 25 units per box, 4 boxes per case. TRAM and TRAM-P manifolds packaged 10 units per box, 4 boxes per case.

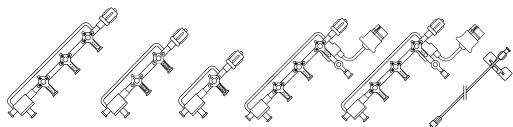


| 200 PSI (14 BAR) | 4 Port Half Body | 3 Port Half Body | 2 Port Half Body | 4 Port TRAM | 4 Port TRAM-P* |
|------------------|---------------------|---------------------|---------------------|----------------|-------------------|
| OFF Handles | 2V4LHWF-R | 2V3HF-R | 2V2HF-R | 2V4LTPHWF-R | 2V4LTCHWF-R |
| Tubing Extension | 2V4LHWF-RXT | | | | |
| 360/OFF Handles | 2V4LHWF-RT | 2V3HF-RT | 2V2HF-RT | 2V4LTPHWF-RT | 2V4LTCHWF-RT |

^{*48&}quot; (122 cm) Compensation Line and Clip



PRESSURISED CONTRAST ADMINISTRATION SYSTEMS

Features one-way piercing Sosa spike and large bore tubing. Packaged 15 units per box, 4 boxes per case.



72" Length (183 cm)

6.5" Length (17 cm)


Catalogue Number

K08-00006

K08-00685

TRAM® MANIFOLDS WITH INTEGRAL TRANSDUCER


The TRAM Manifold with Integral Transducer gives a single operator the convenience to de-bubble, zero and rezero within the sterile field. The TRAM has optimised clinician comfort by reducing hand fatigue with low torque, easy-to-turn wide-spaced handles, even when utilising higher injection pressures. The Devos^{\dagger} TRAM manifold has a check relief valve. Packaged 10 units per box, 4 boxes per case.

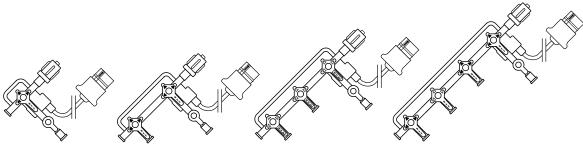

| | • | v | • | • |
|------------------|---------------|-------------|-------------|--------------|
| 200 PSI (14 BAR) | 1 Port | 2 Port | 3 Port | 4 Port |
| ON Handles Wide | | | | |
| Standard | 201LTPHN-R | | 203LTPHN-R | |
| OFF Handles Wide | | 202LTPHWF-R | 203LTPHWF-R | 204LTPHWF-R |
| Devos | | | | 2V4LTPHWF-R |
| Devos with | n 360° handle | | | 2V4LTPHWF-RT |
| Standard | | | 203LTPHF-R | |
| 500 PSI (34 BAR) | | | | |
| ON Handles Wide | | 502LTPHWN-R | 503LTPHWN-R | 504LTPHWN-R |
| Standard | 501LTPHN-R | | 503LTPHN-R | |
| OFF Handles Wide | | 502LTPHWF-R | 503LTPHWF-R | 504LTPHWF-R |
| Standard | | | 503LTPHF-R | |
| | | | | |

TRAM-P™ MANIFOLDS WITH INTEGRAL TRANSDUCER


The TRAM-P features a pressure transducer on the first port. By positioning the compensation line on an IV pole rather than on a table, the TRAM-P maintains a constant calibrated reading. With this configuration, the manifold can be moved to any position without affecting the accuracy of the pressure reading. Comfortable wide-spaced finger grip option. The Devos™ TRAM-P manifold has a check relief valve. Packaged 10 units per box, 4 boxes per case.

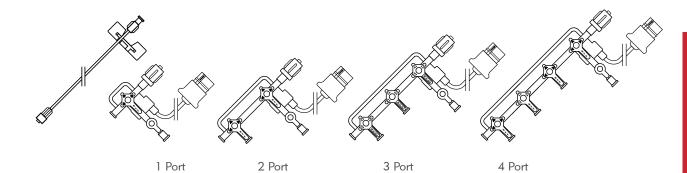

| 200 PSI (14 BAR) | | | |
|------------------------|-------------|-------------|--------------|
| ON Handles Wide | 202LTCHWN-R | 203LTCHWN-R | 204LTCHWN-R |
| Standard 201LTCHN-R | | 203LTCHN-R | |
| OFF Handles Wide | 202LTCHWF-R | 203LTCHWF-R | 204LTCHWF-R |
| Devos | | | 22V4LTCHWF-R |
| Devos with 360° handle | | | 2V4LTCHWF-RT |
| Standard | | 203LTCHF-R | |

500 PSI (34 BAR)

| ON Handles Wide | | 502LTCHWN-R | 503LTCHWN-R | 504LTCHWN-R |
|------------------|------------|-------------|-------------|-------------|
| Standard | 501LTCHN-R | | 503LTCHN-R | |
| OFF Handles Wide | | 502LTCHWF-R | 503LTCHWF-R | 504LTCHWF-R |
| Standard | 501LTCHF-R | | 503LTCHF-R | |

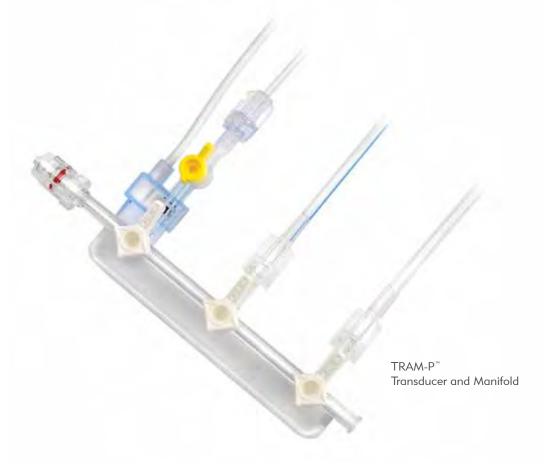


RAPID RESPONSE RIGHT HEART KITS

Right Heart Kits are pre-assembled and include necessary pressure monitoring and fluid management components.

RAPID RESPONSE RIGHT HEART ON KIT


2-port manifold, ON handle with transducer, 60" (152 cm) pressure monitoring tubing, and 60" (152 cm) non-vented small bore tubing flush line. Packaged 10 units per box, 4 boxes per case.

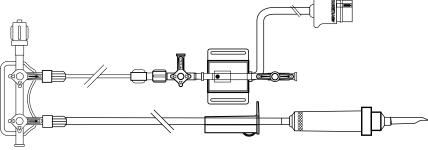

Catalogue Number K09-10471

RAPID RESPONSE RIGHT HEART OFF KIT

2-port manifold, OFF handle with transducer, 60" (152 cm) pressure monitoring tubing, and 60" (152 cm) non-vented small bore tubing flush line. Packaged 10 units per box, 4 boxes per case.

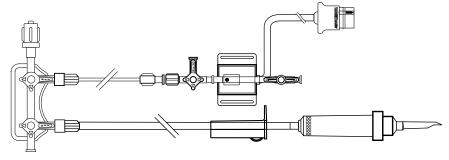

Catalogue Number K09-10472

MARQUIS® SERIES STOPCOCKS

Merit Medical's larger, easy-grip handle makes a Marquis Stopcock effortless to grip and turn. Available in pressure ratings of 200, 500 and 1050 psi with easy-turning handles. Luer options include rotating, swivel nut, fixed and slip. Packaged 50 units per box, 4 boxes per case.



| | Slip Luer | Fixed Male Luer | Swivel Nut | Rotating Male Adapter |
|---------------------------|-----------|--------------------|------------|--------------------------|
| 200 PSI (14 BAR) | | | | |
| 1-way (white handle) | SISLC | S1FLC | SISNC | |
| 500 PSI (34 BAR) | | | | |
| 1-way (light blue handle) | M1SLC | M1FLC | MISNC | |
| 1050 PSI (72 BAR) | | | | |
| 1-way (dark blue handle) | | H1FLC | HISNC | HIRC |













ale Slip Luer Fixed Swivel Nut Rotating Rotating

Male Luer Male Adapter Male Adapter
(Right Orientation) (Left Orientation)

200 PSI (14 BAR)

| 3-way (white handle) S3FC | S3SLC | S3FLC | S3SNC | | |
|---------------------------|-------|-------|-------|---------|-------|
| 4-way (white handle) | S4SLC | S4FLC | S4SNC | | |
| 500 PSI (34 BAR) | | | | | |
| 3-way (light blue handle) | M3SLC | M3FLC | M3SNC | M3RRC | M3RLC |
| 3-way (red handle) | | | | M3RRC-R | |
| 4-way (light blue handle) | | M4FLC | M4SNC | M4RRC | |
| 1050 PSI (72 BAR) | | | | | |
| 3-way (dark blue handle) | | H3FLC | H3SNC | H3RRC | H3RLC |
| 4-way (dark blue handle) | | H4FLC | H4SNC | H4RRC | |
| 1200 PSI (83 bar) | | | | | |
| 3-way (red handle) | | | | U3RRC | |

AIRLESS ROTATING ADAPTERS

Used as connectors between two devices. Luer rotates a full 360° preventing torque transfer between the two attaching devices. Enhances patient safety by minimising the possibility of trapped air. Packaged 25 units per box, 4 boxes per case.







Male-Male Rotating Adapter


Catalogue Number

MFA100

MMA100

CCS™ CORONARY CONTROL SYRINGES


The CCS Coronary Control Syringe has a clear barrel for clarity and smoothness and a solid plunger body to maintain stability and durability under pressure. The rotating and fixed Luers allow flexibility and confidence in the Luer connection. The specially designed safety space limits the potential for introducing air bubbles into the catheter. The CCS locking ring permits vacuum or negative pressure. The Inject8TM and Inject10TM offer clinicians more pressure with less applied force. Packaged 25 units per box, 4 boxes per case.

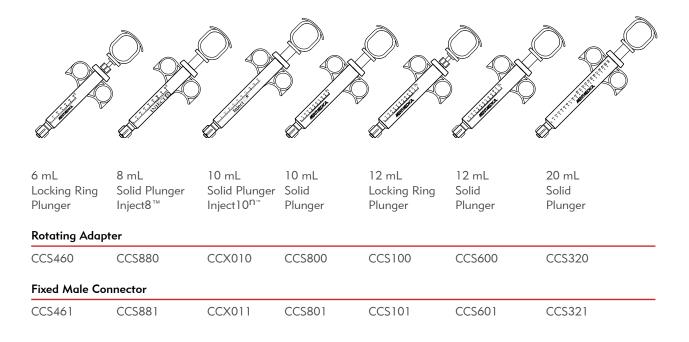




SMART TIP™ CONTROL SYRINGE with blue silicone tip, ring plunger and ring grip. Packaged 25 units per box, 4 boxes per case.

| | 10 mL Solid Plunger | 12 mL Solid Plunger | 20 mL Solid Plunger |
|----------------------|------------------------|------------------------|------------------------|
| Rotating Adapter | | | |
| | ST800 | ST600 | ST320 |
| Fixed Male Connector | | | |
| | ST801 | ST601 | ST321 |

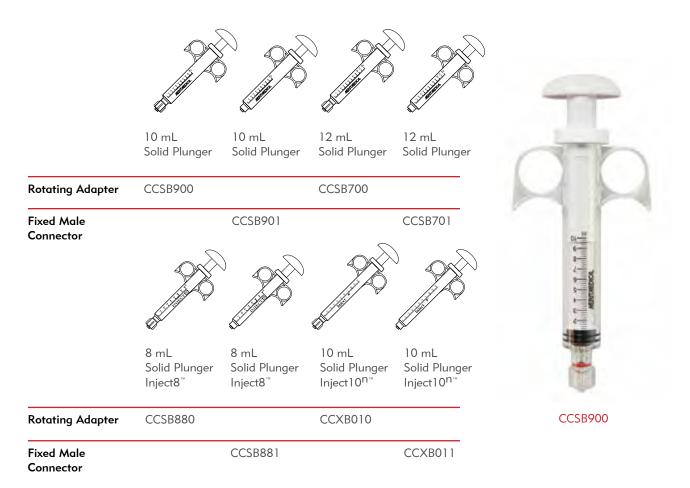

CORONARY CONTROL SYRINGE with palm pad plunger and wing grip. Packaged 25 units per box, 4 boxes per case.

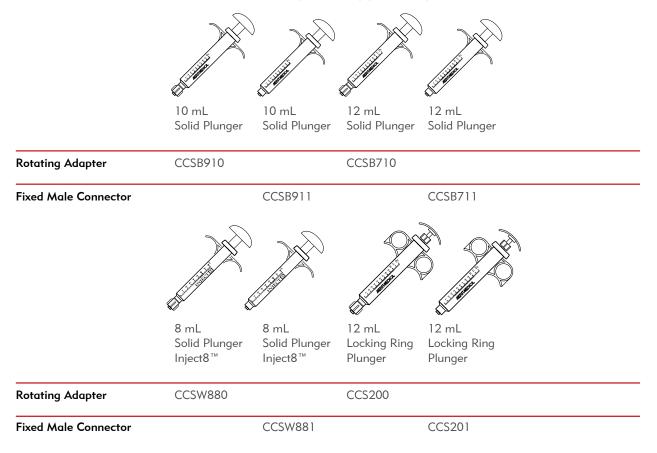

RXP® - RAPID EXCHANGE PREP SYRINGE


The RXP syringe has been specifically designed to easily flush the wire lumen of rapid exchange balloons. The barrel is made of clear polycarbonate material which provides a glass-like look and feel during use. Packaged 25 units per box, 4 boxes per case.

Catalogue Number RXPOR



VACLOK® NEGATIVE PREPARATION SYRINGES


The VacLok negative preparation syringe comes with a clear polycarbonate barrel, white plunger, four or six position locking mechanism and fixed male Luer. Packaged 20 or 25 units per box, 4 boxes per case.

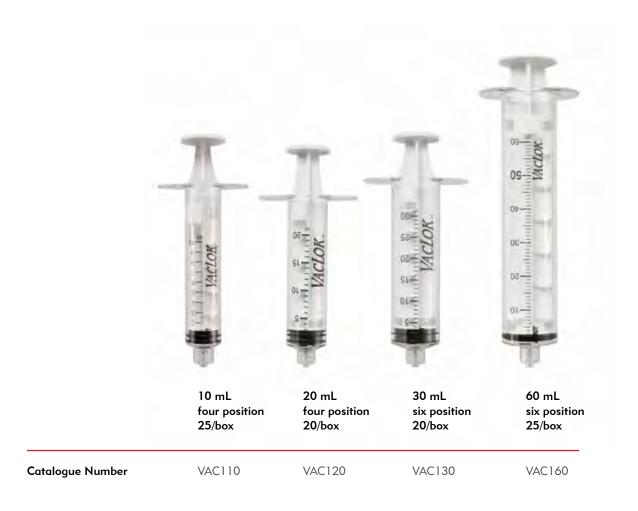

With reliable precision, customised configurations, and a clear fluid path, Meritrans Pressure Transducers can be customised to fit the needs of your physicians and labs. Our transducers are available in both hand-held and Paley setups; Meritrans can also be configured with a broad range of Merit accessories.

MERITRANS BLOOD PRESSURE TRANSDUCERS with winged housing.

Packaged 25 units per box, 4 boxes per case.

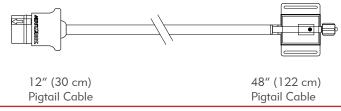

Catalogue Number MER100 MER148



Packaged 25 units per box, 4 boxes per case.




12" (30 cm) Pigtail Cable 48" (122 cm) Pigtail Cable

Catalogue Number

MER212

MER200

MERITRANS MER100 with bonded standard pressure 1-way and 3-way Marquis® stopcocks. Packaged 25 kits per box, 4 boxes per case.




12" (30 cm) Pigtail Cable

Catalogue Number

K11-00096


MERITRANS MER100 with two bonded standard pressure 1-way Marquis stopcocks. Packaged 15 kits per box, 4 boxes per case.



Catalogue Number

K11-00098

MERITRANS MER100 with two bonded standard pressure 3-way Marquis® stopcocks. Packaged 15 kits per box, 4 boxes per case.




12" (30 cm) Pigtail Cable

Catalogue Number

K11-00099

MERITRANS MER100 with bonded standard pressure 3-way and 1-way Marquis stopcocks. Packaged 15 kits per box, 4 boxes per case.




12" (30 cm) Pigtail Cable

Catalogue Number

K11-00100

MERITRANS MER200 with bonded standard pressure 1-way Marquis stopcock. Packaged 25 kits per box, 4 boxes per case.




48" (122 cm) Pigtail Cable

Catalogue Number

K11-00137

MERITRANS MER200 with a 3-way Marquis stopcock bonded to both ends. Packaged 15 kits per box, 4 boxes per case.




48" (122 cm) Pigtail Cable

Catalogue Number

K11-00144

MERITRANS MER100 with 3-way Marquis® stopcocks bonded to the female Luer, flush device and 72" (183 cm) small bore fluid administration line with vented/filtered drip chamber. Packaged 15 kits per box, 4 boxes per case.




12" (30 cm) Pigtail Cable

Catalogue Number

K11-00280

MERITRANS MER200 with a 3-way Marquis Stopcock (medium pressure, rotating male adapter) and a 1-way Marquis stopcock. Packaged 15 kits per box, 4 boxes per case.

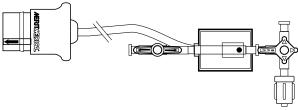


48" (122 cm) Pigtail Cable

Catalogue Number

K11-00392

MERITRANS MER200 with a 3-way Marquis stopcock and a 1-way Marquis stopcock. Packaged 15 kits per box, 4 boxes per case.




48" (122 cm) Pigtail Cable

Catalogue Number

K11-00202

MERITRANS MER100 with a 1-way Marquis stopcock. Packaged 15 kits per box, 4 boxes per case.




48" (122 cm) Pigtail Cable

Catalogue Number

K11-01321

CONTINUED

MERITRANS MER200 with a 3-way Marquis® Stopcock and a 1-way Marquis stopcock. Packaged 15 kits per box, 4 boxes per case.

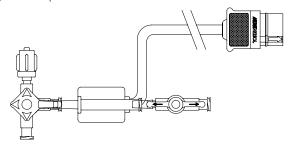

48" (122 cm) Pigtail Cable


Catalogue Number


K11-00419

MERITRANS® ACCESSORIES

MERITRANS ORGANISER

Plate with coloured labels. Packaged 5 units per box.





/// MERITAEDICAL

MER111

2 Port


4 Port


Catalogue Number

MER110

CLIPPER POLE MOUNT

Packaged 1 unit per box.





Rotates to Vertical or Horizontal Position

Fixed Position

Catalogue Number

MER112

MER113

NOTE: Autoclavable Clipper® (MER113A) is available upon special request. Please allow six weeks lead time for delivery.

MERITRANS REUSABLE CABLE SERIES

Includes 19 standard cables for use with most monitor configurations. Compatible cables for your monitoring system available through your Merit representative.

